

CHANAKYA NATIONAL LAW UNIVERSITY, PATNA

Nyaya Nagar, Mithapur, Patna -1, Ph. No. – 0612-2352300, Website : www.cnlul.ac.in

NIT No. - 02/2017-18 (Group A, B, C, D, E & F)

Dated: - 18/05/2017

Separate sealed Bids are invited under two bid system for **NIT 02/2017-18** Group A (Construction of compound wall and Drainage work Group (B, C, D, E,) Painting work in quarters, Group (F) Repairing work, by the Registrar, Chanakya National Law University, Nyaya Nagar, Mithapur, Patna - 800001.

Important Information

| | | | |
|-------------|---|---|---------------------------|
| I. | Sale of Bid Document | : | From 18/05/2017 |
| II. | Date & Time of receipt of bid | : | 27/05/2017 up to 04:30 pm |
| III. | Date & Time of Pre Bid meeting | : | 23/05/2017 at 11:00 am |
| IV. | Date & Time of opening of Technical Bid | : | 27/05/2017 at 05:00 pm |
| V. | Date & Time of opening of Financial bid | : | 30/05/2016 at 05:00 pm |
| VI. | Place of all meetings | : | Registrar`s Chamber |

General Conditions

- Bidders or their authorised representatives shall remain present at the time of opening of Technical Bid and Bidders who qualify in the Technical bid shall remain present at the time of opening of Financial Bid.**
- All the meetings will be held in Registrar chamber, CNLU, Patna.
- Bidder should be registered in appropriate class (III / or IV) with works department of State Government / Central Government, for the above works. Copy of the updated valid registration certificates must be submitted along with the technical bid. The bidder must have completed similar work not less than the amount equal to 50% of the estimated cost in any of the last five years i.e. 2012-13 to 2016-17. Supporting documents in respect of experience of similar work is to be furnished by the bidder along with the technical bid.
- The bid must be accompanied with Earnest Money Deposit of the amount mentioned in bill of quantity in the shape of Bank draft issued by any Nationalised Bank / Schedule Bank in favour of the Registrar Chanakya National Law University, Patna, payable at Patna. The E.M.D. should be placed in the technical Bid envelope. Duly filled in BOQ should be placed in the Financial Bid envelope. Both envelopes should be placed in one sealed envelope. The name of the work and NIT No. should be mentioned at the top of covering of this envelope.
- The envelope containing Financial Bid of only those bidders will be opened whose technical bids will be found responsive.
- The work is required to be completed within the period mentioned against each work. It will be reckoned from the date of the issue of work order. If the work is not completed within the completion period liquidated damages @0.5% of agreement value per day of delay will be levied (subject to maximum of 10%). If the liquidated damages reach the level of 10% the contract is liable to be rescinded. (As per clause 2 of Form No.- F – 2 of Bihar Public Works Department)
- Work shall be executed strictly as per specification and direction of Engineer in charge.
- Any Suggestions/Clarifications may be put forth in the pre bid meeting.

CHANAKYA NATIONAL LAW UNIVERSITY, PATNA

Nyaya Nagar, Mithapur, Patna -1, Ph. No. – 0612-2352300, Website : www.cnl.u.ac.in

NIT No. - 02/2017-18 (Group A, B, C, D, E & F)

Dated: - 18/05/2017

9. The bidder should deposit copy of VAT registration, PAN card, Labour License, performance certificate, copy of audited financial statements affidavit on non-judicial stamp paper along with the bid.
10. The Chanakya National Law University, Patna reserves the right to reject any or all bids without assigning any reason whatsoever.
11. The price will remain firm and fixed during the pendency of contract. It will not vary on any account whatsoever.
12. Successful bidder will have to deposit 3% of agreement value as performance deposit. Taking into consideration the earnest money it will be 5%. Rest 5% will be deducted from the on A/c Bills paid against work executed. The performance security will be released after 60 days of completion of defect liability period. Defect Liability period for above mentioned works will be three years after the date of the final bill.
13. Dispute if any, will be subject to Patna jurisdiction only.
14. Amendment of Tender Document
 - a) At any time prior to the last date for receipt of bids, the University may for any reason, whether at its own initiative or in response to a clarification requested by a prospective bidder, modify the quotation document by an amendment.
 - b) The amendment will be notified through official website of Chanakya National Law University for all the prospective bidders.
 - c) In order to afford prospective bidders reasonable time in which to take the amendments into account in preparing their bids, the client may, its discretion extend the last date for the receipt of the bids.

SPECIAL CONDITIONS FOR ALL

1. All the T&P is to be arranged by contractor & nothing extra shall be paid on this account.
2. All labour bye laws & regulations are to be followed by the contractor.
3. The bidder shall be bound to follow the restriction on the movement of labour, materials imposed by any other authority connected with the site due to security or any other reasons connected with the event. No claim shall be entertained on this account.
4. The bidder shall take all precautions to avoid accidents by exhibiting necessary cautions boards, lights, flags etc. and ensure that no hindrance is caused to the traffic. He shall be responsible for all damages, accidents, caused due to negligence.
5. The bidder shall be fully responsible for the safe custody of the material issued to him by the University. The contractor shall arrange all tools and plants necessary for the execution of the work at his own cost.
6. L1 will be considered on the total amount of bids of the respective work.
7. Those bidders who are either blacklisted or debarred or against whom FIR has been lodged or whose contract has been rescinded by any Government /PSU or who have failed to execute the awarded work in past in respect of the any of the above work of CNLU will not allowed to participate in this tender process. Hence they have to insure they that the documents enclosed along with the bid are genuine. If something is found wrong or fake FIR may be inflicted against them. An affidavit on non – judicial stamp paper to this affect will have to be submitted along with the technical bid. Otherwise the technical bid may not be considered.
8. The contractor under this contract commits himself to use first class materials and assumes full responsibility for the quality of all materials incorporated or brought for incorporation in the work. The work should shall be executed in accordance with best engineering practice and as per direction of Engineer in charge.
9. All the excavated materials including debris, loose earth etc., shall be carted away and disposed of as directed by Engineer in charge.

CHANAKYA NATIONAL LAW UNIVERSITY, PATNA

Nyaya Nagar, Mithapur, Patna -1, Ph. No. – 0612-2352300, Website : www.cnlu.ac.in

NIT No. - 02/2017-18 (Group A, B, C, D, E & F)

Dated: - 18/05/2017

10. The arrangement and cost of all storage shed, labour shed, vats, tools and plants, scaffolding, water supply, electric power supply, and building accessories shall be borne by the contractor. He shall also provide all facilities and medical aid to the labours employed by him at his cost. No extra payments will be made for loading, unloading carriage, transportation of materials/ equipment's on any account whatsoever.

TECHNICAL SPECIFICATIONS FOR ALL

1. **CEMENT: - ACC, ULTRATECH AND LAFARGE (43 GRADE) OR OF EQUIVALENT TECHNICAL SPECIFICATION.**
2. **REINFORCEMENT STEEL: TISCON, SAIL (TMTC 500) OR OF EQUIVALENT TECHNICAL SPECIFICATIONS.**
3. **BRICK: - FIRST QUALITY.**
4. **COARSE SAND:- SONE RIVER**
5. **STONE CHIPS : AGGREGATE 20 MM NOMINAL SIZE (5/8 GRADE)**
6. **PAINTS : ASIAN PAINTS, BERGER OR EQUIVALENT, CEMENT PRIMER ASIAN.**
7. **Birla & J.K. Wall Putty use.**
8. **All risks of loss of or damage to physical property and of personal injury and death which arise during and in consequence of the performance of the contract other than the expected risks are the responsibility of the contractor.**

**Prof. (Dr.) S. P. Singh
Registrar**

Patna Dated 18th May 2017

CHANAKYA NATIONAL LAW UNIVERSITY, PATNA

Nyaya Nagar, Mithapur, Patna -1, Ph. No. – 0612-2352300, Website : www.cnl.u.ac.in

NIT No. - 02/2017-18 (Group A, B, C, D, E & F)

Dated: - 18/05/2017

NIT No. 02/2017-18 (Group A) Dated 18/05/2017

Name of Work:- Construction of Compound Wall & Drainage Work

Earnests Money: Rs. 32000/-

Document Cost: Rs. 5000/-

Time of completion Work: 45 Days

| Sl.No | SOR/DSR | ITEM DESCRIPTION | Qty. Of | Unit | Rate(₹) | Amount(₹) |
|-------|---------|---|---------|--------|---------|------------|
| 1 | 20.3A | Making 25 cm (10") dia bore up to 4 mtr depth below ground with hand auger of approved quality in ordinary soil (vide classification of soil item A) true to plumb and without eccentricity in any stage of operation and disposal of the excavated earth up to 50 mtr , Lead including all lifts , all complete as per approved design and direction of E/I Details of cost . 78.0x6.0=468 | 468.0 | metter | 107.1 | 50122.8 |
| 2 | 20.3A-2 | 63 CM (25) UNDER -REAM Making 63 cm (25) dia under ream at required with hand auger of approved quality in ordinary soil (vide classification of soil item - A) true to plumb and without eccentricity in my stage of operation and disposal of the excavated earth up to 50 mts lead including all lifts , all complete as per approved design and direction of (E/I) | 78.0 | each | 114.3 | 8915.4 |
| 3 | 5.33A-1 | Providing and laying in position machine batched, machine mixed and machine vibrated design mix cement concrete of specified grade for reinforced cement concrete structural elements, excluding the cost of centring, shuttering finishing and reinforcement, M-20 grade reinforced cement concrete Pile - 78x3.14x(.125) ² x6.0=22.96 Cap- .6x.6x.35x78=9.82 Beam- 233x.3x.25=17.47 Ream- 1/2x.2x.2x78=3.0 | 53.25 | cum | 4533.3 | 241398.225 |
| 4 | 11.72 | Providing designation 100 A one brick flat soling joints filled with local sand including cost of watering, taxes, royalty all complete as per building specification and direction of E/I, 78x.6x.6=28.08m 233x.25=58.25 Drain work 233x.325=75.72 | 162.05 | sqm | 253.8 | 41128.29 |

CHANAKYA NATIONAL LAW UNIVERSITY, PATNA

Nyaya Nagar, Mithapur, Patna -1, Ph. No. – 0612-2352300, Website : www.cnl.u.ac.in

NIT No. - 02/2017-18 (Group A, B, C, D, E & F)

Dated: - 18/05/2017

| | | | | | | |
|----|-----------|---|--------|-----|---------|------------|
| 5 | 4.1.5 | Providing and laying in position cement concrete of specified grade excluding the cost of centring and shuttering-all work upto plinth level.1:3:6 (1 Cement: 3 coarse sand : 6 graded stone aggregate 20 mm nominal size) 86.33x.075=6.47m ³ | 6.47 | cum | 3174.3 | 20537.721 |
| 6 | 5.33A.2.1 | Providing and laying in position machine batched, machine mixed and machine vibrated design mix cement concrete of specified grade for reinforced cement concrete structural elements, excluding the cost of centring, shuttering finishing and reinforcement, M-20 grade reinforced cement concrete Walls columns, pillars, posts and struts, Brand ultratech , ACC and Lafarge cement 78x.25x.3x1.8=10.53 m ³ | 10.53 | cum | 4860.5 | 51181.065 |
| 7 | 5.33A.2.2 | Beams, plinth beams, girders, brusses, cantilevers, Suspended floors lintels roofs and staircases including spiral staircases, shelves etc. 233x.25x.2=11.65 | 11.65 | cum | 5083.8 | 59226.27 |
| 8 | 6.1.12/1 | Brick work with bricks of class designation 100A in foundations and plinth in Cement mortar 1 :4 (1 cement: 4 coarse sand) 233x1.3x.25=75.72 | 75.72 | cum | 4490.60 | 340028.232 |
| 9 | 13.11.2 | Cement plaster in course sand 12 mm cement plaster of mix: 1:4(1 cement :4 coarse sand) 233x1.80=419.4 m ² | 419.4 | sqm | 114.70 | 48105.18 |
| 10 | 13.12.2 | 15 mm cement plaster on rough side of single or half brick wall of mix. 1:4(1 cement: 4 coarse sand) 233.0x2.5=477.65 | 477.65 | sqm | 133.20 | 63622.98 |
| 11 | 13.79 | Finishing walls with water proofing cement paint of approved brand and manufacture and of required shade to give an even shade New work (three or more coats) | 899.38 | sqm | 63.20 | 56840.816 |
| 12 | 13.78.1 | Applying one coat of cement primer of approved brand and manufacture on wall surface: Cement primer | 899.38 | sqm | 26.90 | 24193.322 |
| 13 | 5.9.1 | Centring and shuttering including strutting,propping etc. and removal of form for Foundations, footings, bases of columns etc. for mass concrete. Cap-78x1.8x.35=49.14 Beam-233x2.075=34.95 233x.3x2=139.8 | 223.89 | sqm | 169.0 | 37837.41 |

CHANAKYA NATIONAL LAW UNIVERSITY, PATNA

Nyaya Nagar, Mithapur, Patna -1, Ph. No. – 0612-2352300, Website : www.cnl.u.ac.in

NIT No. - 02/2017-18 (Group A, B, C, D, E & F)

Dated: - 18/05/2017

| | | | | | | |
|----|---------|--|--------|-----|--------|----------|
| 14 | 5.9.6 | Centring and shuttering including strutting,propping etc. and removal of form for Columns,Pillars, Piers, Abutments, Posts and Struts 2x78x.3x1.3=54.6 | 54.6 | sqm | 357.60 | 19524.96 |
| 15 | 5.9.5 | Centring and shuttering including strutting,propping etc. and removal of form for. Lintels, beams, plinth bams, griders, bressumers and contilevers. 2x233x.2=93.2 | 93.2 | sqm | 261.70 | 24390.44 |
| 16 | 15.3 | Demolishing R.C.C. work including stacking of steel bars and disposal of unserviceable material withing 50 metres lead: 233.0x.3x.4=27.96 Drain work 233x.5x.3=34.95 | 62.91 | cum | 839.0 | 52781.49 |
| 17 | 5.22.1 | Reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete. Mild steel 6.00 mm dia 40x28x.68x.22=467 | 467 | kg | 54.3 | 25358.1 |
| 18 | 5.22.7A | Thermo-Mechanically Treated bars TMTC-500-8mm dia. Beam Ring - 2x1554x1.1x.39=1334.0 column-12x78x1.1x.39=401 | 1735.0 | kg | 56 | 97160 |
| 19 | 5.22.7B | Thermo-Mechanically Treated bars TMTC-500-10mm dia. Pile-5x78x6.15xx.26=1487.0 Beam-2x6.0x233x.62=1734 | 3221.0 | kg | 53.4 | 172001.4 |
| 20 | 5.22.7C | Thermo-Mechanically Treated bars TMTC-500-12mm dia.column 6x78x2.2x.89=916 | 916 | kg | 53.4 | 48914.4 |
| 21 | 4.1.2 | Providing and laying in position cement concrete of specified grade exluding the cost of centring and shuttering-all work upto plinth level. 1:1.5:3(1 Cement :1.5 coarse sand:3 graded stone aggregate 20 mm nominal size) Drain Work 233.0x.5x.075=8.74 3.0x4.0x.10=1.2 | 9.9 | cum | 3741.3 | 37038.87 |
| 22 | 6.18.4A | Half brick masonry with bricks of class designation 100A in foundations and plinth in : Cement mortar 1:4 (1 cement: 4 coarse send) 233x.3=69.9 | 69.9 | sqm | 555.1 | 38801.49 |

CHANAKYA NATIONAL LAW UNIVERSITY, PATNA

Nyaya Nagar, Mithapur, Patna -1, Ph. No. – 0612-2352300, Website : www.cnlul.ac.in

NIT No. - 02/2017-18 (Group A, B, C, D, E & F)

Dated: - 18/05/2017

| | | | | | | |
|--------------|---------|--|-------|-----|-------|-------------|
| 23 | 13.17.2 | 12 mm cement plaster 1:3(1 cement: 3 coarse sand) finished with a floating coat of near cement $233 \times 1.15 = 268.0$ | 268.0 | sqm | 145.5 | 38994 |
| 24 | 13.26 | Neat cement punning | 268.0 | sqm | 32.3 | 8656.4 |
| Total | | | | | | 1606759.261 |

| Sl. No. | Rate Tendered | In Figure | In Words |
|---------|----------------------------------|-----------|----------|
| 1 | Percentage below estimated cost | | |
| 2 | On estimated Cost | | |
| 3 | Percentage above Estimated Cost | | |
| 4 | Number of Cutting / Over Writing | | |

Signature of Bidder

Date

Rubber Stamp of the Firm

Address

Phone No./Mobile No. E-mail Address


Prof. (Dr.) S. P. Singh
Registrar

CHANAKYA NATIONAL LAW UNIVERSITY, PATNA

Nyaya Nagar, Mithapur, Patna -1, Ph. No. – 0612-2352300, Website : www.cnl.u.ac.in

NIT No. - 02/2017-18 (Group A, B, C, D, E & F)

Dated: - 18/05/2017

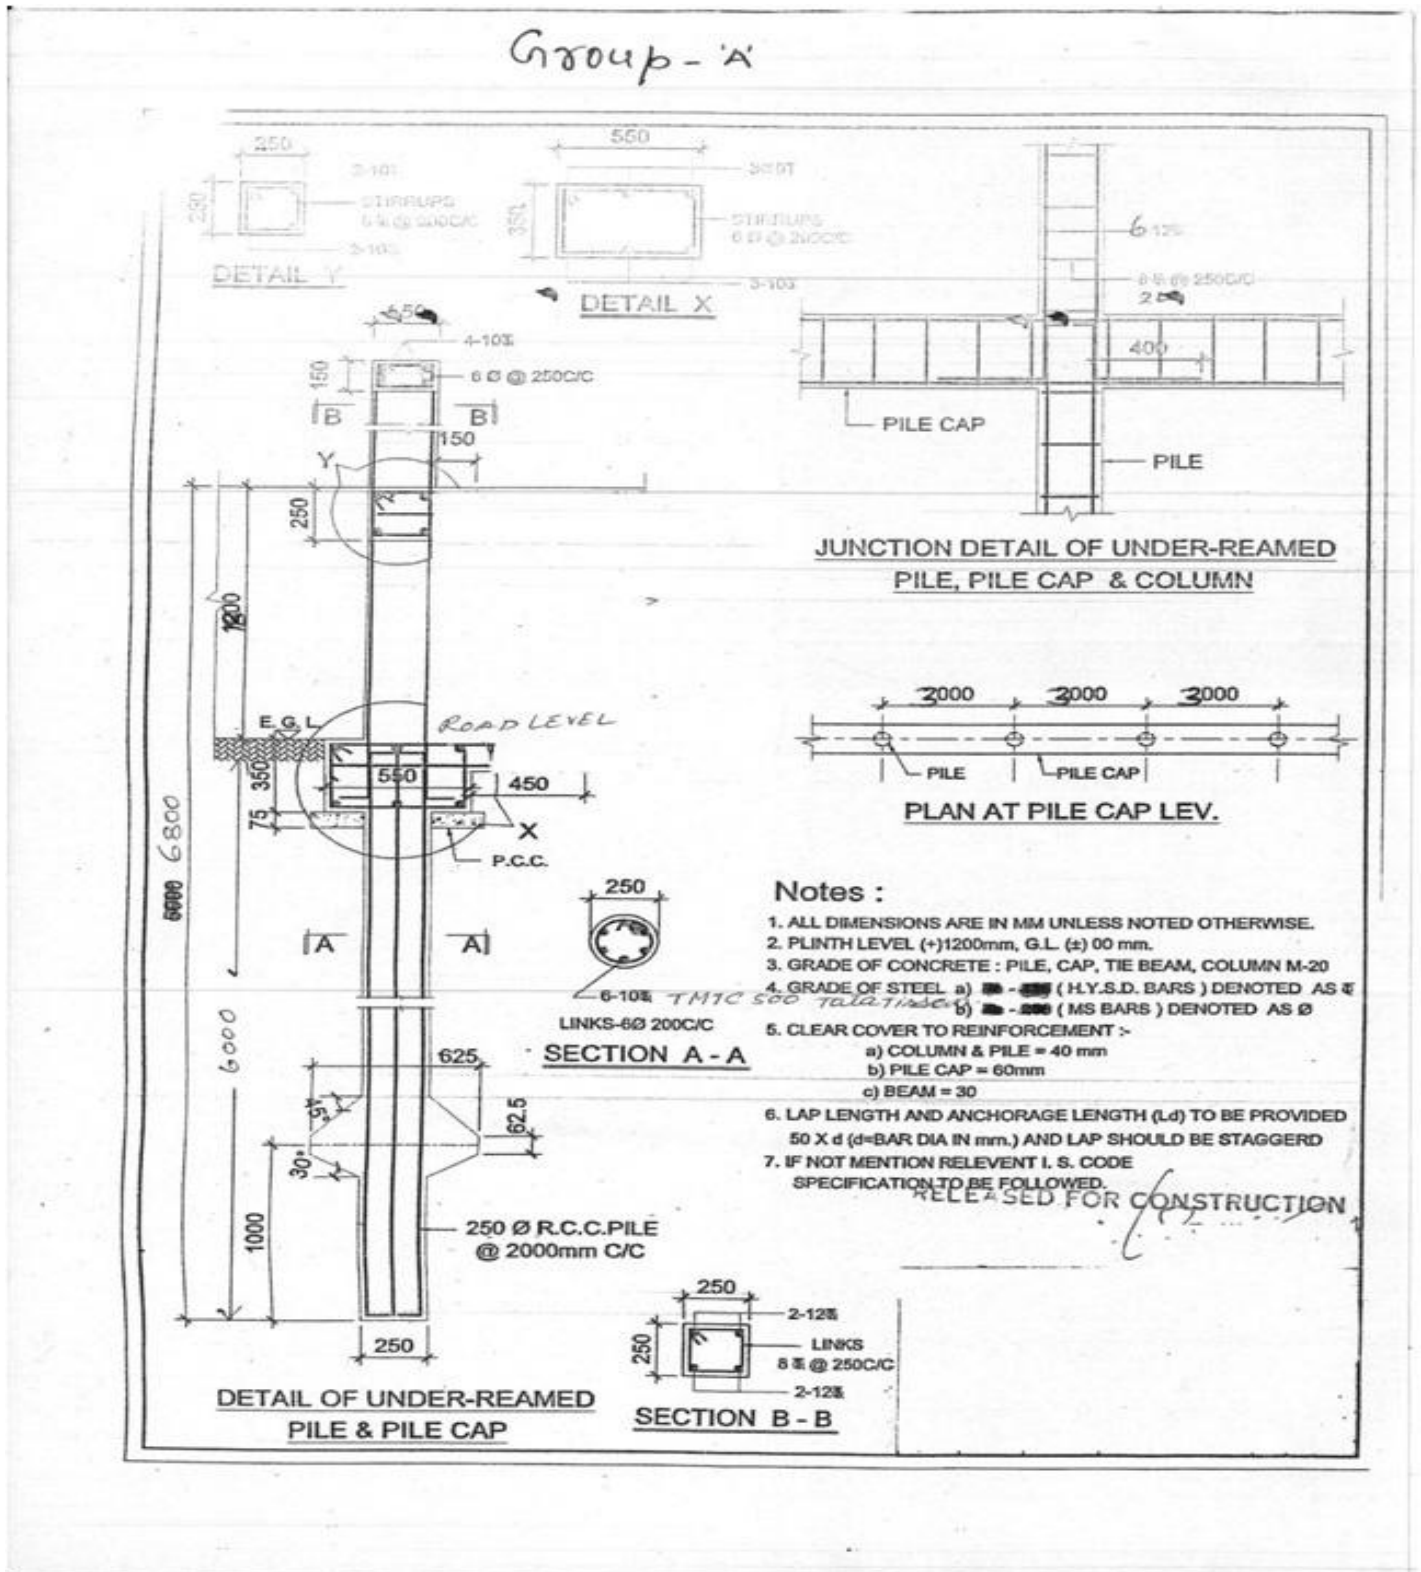

CHANAKYA NATIONAL LAW UNIVERSITY, PATNA

Nyaya Nagar, Mithapur, Patna -1, Ph. No. – 0612-2352300, Website : www.cnl.u.ac.in

NIT No. - 02/2017-18 (Group A, B, C, D, E & F)

Dated: - 18/05/2017

NIT No. 02/2017-18 (Group B) Dated 18/05/2017

Name of Work:- Inner / Outer Painting, & Enamel Painting Work Type I

Earnests Money: Rs. 5300/-

Document Cost: Rs. 1250/-

Time of completion Work: 1 month

| Sl.No | SOR/DSR | ITEM DESCRIPTION | Qty. Of | Unit | Rate(₹) | Amount(₹) |
|-------|---------|---|---------|------|---------|-----------|
| 1 | 13.74 | Removing white or colour wash by scrapping and sand paper in and preparing the surface smooth including necessary repair scratches etc. complete Celling Inner Wall 7.73x14.62x2=226.0 m2 1/2x6.2x6.2=19.22 m2 stair 3.0x2.6=7.80 <u>1/2x3.3=4.50</u> Total=257.52x3 =772.56 m2 Wall varamda 2.6x1.3x2x9 =60.00 2x16.33x3=97.98 2x3x3=18.00 3x8x3=72.00 Room 2x16.18x3=97.0 Dining 19.78x3=59.34 kitchen 12.76x3=38.28 12.2x3=36.60 <u>10.0x3=30</u> Total= 449.2x3 =1347.60 Total =2180.16 m2 outer wall 10.0x.60x6=36.0 2x74.89x10.0=1497.80 2x74.89x1.0=149.78 Stair 12.3x3.0=36.90 Total 1720.48 | 3900.64 | sqm | 4.6 | 17942.944 |
| 2 | 13.77A | Distempering with oil bound washable distemper of approved brand and manufacture to give an even shade .Distempering with 1st quality washable distemper (ready made) of approved manufacturer and of required shade and colour complete. As per manufacture's specifications. company make ASAIN / equivalent (approved by university) same area item no. 1 | 2180.13 | sqm | 22.9 | 49924.977 |

CHANAKYA NATIONAL LAW UNIVERSITY, PATNA

Nyaya Nagar, Mithapur, Patna -1, Ph. No. – 0612-2352300, Website : www.cnl.u.ac.in

NIT No. - 02/2017-18 (Group A, B, C, D, E & F)

Dated: - 18/05/2017

| | | | | | | |
|--------------|---------|---|---------|-----|------|-------------------|
| 3 | 13.79.1 | Finishing walls with water proofing cement paint of approved brand and manufacture and of required shade to give an even shade New work (Three coats) Company make ASAIN first quality same aria item no. 1 | 1720.48 | sqm | 42.8 | 73636.544 |
| 4 | 13.82.3 | Painting with ready mixed paint of approved brand and manufacture in all shades to give an even shade:Old steel work (Two coats) company make ASAIN/Equivalent First Quality (approved by university) Windows 3x2x10x1.5x1.35= 121.50 Chaukhat Farme 3x2x13x.90x2.1=147.42 C.G.gate 1.5x2.4x2=7.20 1.0x1.2x=1.20 | 277.32 | sqm | 40.7 | 11286.924 |
| 5 | 13.80 A | Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth complete. Make company Birla putty / Equivalent (approved by university) Item No 1 = 3900=2% | 78.0 | sqm | 77.4 | 6037.2 |
| 6 | 13.78 | Applying one coat of cement primer of approved brand and manufacture on wall surface: company make ASAIN/Equivalent First Quality (approved by university) same aria item no. 1 | 3900.0 | sqm | 26.9 | 104910 |
| Total | | | | | | 263738.589 |

| Sl. No. | Rate Tendered | In Figure | In Words |
|---------|----------------------------------|-----------|----------|
| 1 | Percentage below estimated cost | | |
| 2 | On estimated Cost | | |
| 3 | Percentage above Estimated Cost | | |
| 4 | Number of Cutting / Over Writing | | |

Signature of Bidder

Date

Rubber Stamp of the Firm

Address

Phone No./Mobile No. E-mail Address

Prof. (Dr.) S. P. Singh
Registrar

CHANAKYA NATIONAL LAW UNIVERSITY, PATNA

Nyaya Nagar, Mithapur, Patna -1, Ph. No. – 0612-2352300, Website : www.cnl.u.ac.in

NIT No. - 02/2017-18 (Group A, B, C, D, E & F)

Dated: - 18/05/2017

NIT No. 02/2017-18 (Group C) Dated 18/05/2017

Name of Work:- Inner / Outer Painting, & Enamel Painting Work Type II

Earnests Money: Rs. 7300/-

Document Cost: Rs. 1250/-

Time of completion Work: 1 month

| Sl.No | SOR/DSR | ITEM DESCRIPTION | Qty. Of | Unit | Rate(₹) | Amount(₹) |
|-------|---------|---|---------|------|---------|-----------|
| 1 | 13.74 | Removing white or colour wash by scrapping and sand paper in and preparing the surface smooth including necessary repair scratches etc. complete Celling Inner Wall 9.625x3.625=34.89 m2 5.5x3.0=16.50 m2 Kitchen 2.7x1.8=4.86 wall 74.40x3.0=223.20 Chhaja 5.0x1.0x3=15.0 Total= 294.45x12 =3533.40 m2 outer wall 35.0x10.5x4=1470.0 Balcony 57x1.1x2x12=150.48 window 1.3x.70x2x20x3=109.20 side 1.5x.4x5x12=144.0 stair 7x3x1=21 Side 7x.5x.35=12.25 wall 4x3x6=72 Mumty 4x3x2=24 Parapet 35x1x4=140.0 Total= =2142.93 m2 | 5676.33 | sqm | 4.6 | 26111.118 |
| 2 | 13.77A | Distempering with oil bound washable distemper of approved brand and manufacture to give an even shade . Distempering with 1st quality washable distemper (ready made) of approved manufacturer and of required shade and colour complete. As per manufacture's specifications. company make ASAIN / equivalent (aproved by university) same aria item no. 1 | 3533.40 | sqm | 22.9 | 80914.86 |

CHANAKYA NATIONAL LAW UNIVERSITY, PATNA

Nyaya Nagar, Mithapur, Patna -1, Ph. No. – 0612-2352300, Website : www.cnlul.ac.in

NIT No. - 02/2017-18 (Group A, B, C, D, E & F)

Dated: - 18/05/2017

| | | | | | | |
|----|---------|---|---------|-----|------|------------|
| 3 | 13.79.1 | Finishing walls with water proofing cement paint of approved brand and manufacture and of required shade to give an even shade New work (Three coats) Company make ASAIN first quality same aria item no. 1 | 2142.93 | sqm | 42.8 | 91717.404 |
| 4 | 13.82.3 | Painting with ready mixed paint of approved brand and manufacture in all shades to give an even shade:Old steel work (Two coats) company make ASAIN/Equivalent First Quality (approved by university) Windows 1.1x2.1x7=16.17 C.G.gate 3.0x2.5x4=30m2 Stair 4.5x.9x12=48.6 | 94.77 | sqm | 40.7 | 3857.139 |
| 5 | 13.80 A | Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth complete. Make company Birla putty / Equivalent (approved by university) Item No 1 = 5676.33=2% | 113.52 | sqm | 77.4 | 8786.448 |
| | 13.78 | Applying one coat of cement primer of approved brand and manufacture on wall surface: company make ASAIN/Equivalent First Quality (approved by university) same aria item no. 1 | 5676.33 | sqm | 26.9 | 152693.277 |
| 11 | | Total | | | | 364080.246 |

| Sl. No. | Rate Tendered | In Figure | In Words |
|---------|----------------------------------|-----------|----------|
| 1 | Percentage below estimated cost | | |
| 2 | On estimated Cost | | |
| 3 | Percentage above Estimated Cost | | |
| 4 | Number of Cutting / Over Writing | | |

Signature of Bidder

Date

Rubber Stamp of the Firm

Address

Phone No./Mobile No. E-mail Address

Prof. (Dr.) S. P. Singh
Registrar

CHANAKYA NATIONAL LAW UNIVERSITY, PATNA

Nyaya Nagar, Mithapur, Patna -1, Ph. No. – 0612-2352300, Website : www.cnl.u.ac.in

NIT No. - 02/2017-18 (Group A, B, C, D, E & F)

Dated: - 18/05/2017

NIT No. 02/2017-18 (Group D) Dated 18/05/2017

Name of Work:- Inner / Outer Painting, & Enamel Painting Work Type IV

Earnests Money: Rs. 7300/-

Document Cost: Rs. 1250/-

Time of completion Work: 1 month

| Sl.No | SOR/DSR | ITEM DESCRIPTION | Qty. Of | Unit | Rate(₹) | Amount(₹) |
|-------|---------|--|---------|------|---------|-----------|
| 1 | 13.74 | Removing white or colour wash by scrapping and sand paper in and preparing the surface smooth including necessary repair scratches etc. complete Celling Inner Wall Room - 2x12.35x3=74.10 m2 wall - 13.65x3=40.95 Kitchen - 9.16x3=27.48 Self - 2.7x3.0=8.10 W.C - 4.45x3.0=13.35 Varamda -6.35x3.0=19.05 7.38x3.0=22.14 16.0x3.0=48.00 Total= 253.17x4x2 =2025.36 m2 Mumpty - 13.0x3.0 =39.00 m2 Celing - 7.54x6.125x4x2 =372.47 m2 3.0x3.0 =9.0 m2 outer wall 30.18x7.0x4 = 845.04 m2 3.0x7.0x4 = 84.00m2 parapet - 30.18x1.0 = 112.72m2 mampty - 14x3.0 = 42.00m2 Total =1091.70m2 | 3537.53 | sqm | 4.6 | 16272.638 |
| 2 | 13.80A2 | Providing and applying white cement based putty of average thickness 2 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth same aria item no. 1 company make Birla wall putty and J.K. Wall putty. | 71.0 | sqm | 77.4 | 5495.4 |
| 3 | 13.82.3 | Painting with ready mixed paint of approved brand and manufacture in all shades to give an even shade: company make ASAIN/Equivalent First Quality (approved by university) Windows - 7x9.5x1.352=28.35 C.G.gate - 4x2.1x2=16.80 Stair - 4.5x.9x10=40.5 | 85.65 | sqm | 40.7 | 3485.955 |

CHANAKYA NATIONAL LAW UNIVERSITY, PATNA

Nyaya Nagar, Mithapur, Patna -1, Ph. No. – 0612-2352300, Website : www.cnl.u.ac.in

NIT No. - 02/2017-18 (Group A, B, C, D, E & F)

Dated: - 18/05/2017

| | | | | | | |
|----|---------|--|---------|------|--------|-----------|
| 4 | 13.78 | Applying one coat of cement primer of approved brand and manufacture on wall surface: company make ASAIN/Equivalent First Quality (approved by university) same area item no. 1 | 3537.55 | sqm | 26.9 | 95160.095 |
| 5 | 15.3 | Demolishing R.C.C. work including stacking of steel bars and disposal of unserviceable material withing 50 metres lead: 1.2x1.2x.5=.72 , 1.8x.6x.4=.432 | 1.15 | cum | 839 | 964.85 |
| 6 | 4.1.2 | Providing and laying in position cement concrete of specified grade exluding the cost of centring and shuttering-all work upto plinth level. 1:1.5:3(1 Cement :1.5 coarse sand:3 graded stone aggregate 20 mm nominal size) 1.2x1.2x.075=.09 , 1.8x.6x.075=.081 | .171 | cum | 3741.3 | 639.7623 |
| 7 | 11.72 | Providing designation 100 A one brick flat soling joints filled with local sand including cost of watering, taxes, royalty all complete as per building specification and direction of E/I, 1.2x1.2=1.44 , 1.8x.6=1.08 | 2.52 | sqm | 253.8 | 639.576 |
| 8 | 11.37 | Providing and laying Ceramic glazed floor tiles 300x300 mm (thickness sqm 799.40 to be specified by the manufacturer) of ist quality conforming to IS : 15622 of approved make in colours such as white , Ivory , Grey , Fume Red , Brown, laid on 20 mm thick Cement motar 1:4 (1 cement: 4 coarse sand) including pointing the joints with white cement and matching pigment etc., complete. | 3.0 | sqm | 799 | 2397 |
| 9 | 13.77A2 | Distempering with 1st quality washable distemper (ready made) of approved manufacturer and of required shade and colour complete. As per manufacture's specifications. Two or more coats on new work Brand AISIAN | 2075.0 | sqm | 22.9 | 47517.5 |
| 10 | 13.79.2 | Finishing walls with water proofing cement paint of approved brand and manufacture and of required shade to give an even shade | 1462.0 | sqm | 42.8 | 62573.6 |
| 11 | 7189 | U-PVC pipes (working pressure 4 kg/cm ²) Single socketed pipe 100 mm dia. | 18.0 | m | 134.23 | 2416.14 |
| 12 | 7209 | UPVC bend 87.50 110 mm bend | 4.0 | each | 98.85 | 395.4 |
| 13 | 7215 | UPVC pipe clip 110 mm bend | 10.0 | each | 32.26 | 322.6 |
| 14 | 7196 | UPVC single equal Tee (with door) 75x75x75 mm | 2.0 | each | 133.2 | 266.4 |
| 15 | 7192 | UPVC coupler for UPVC drainage pipes 75 mm | 6.0 | each | 35.38 | 212.28 |

CHANAKYA NATIONAL LAW UNIVERSITY, PATNA

Nyaya Nagar, Mithapur, Patna -1, Ph. No. – 0612-2352300, Website : www.cnl.u.ac.in

NIT No. - 02/2017-18 (Group A, B, C, D, E & F)

Dated: - 18/05/2017

| | | | | | | |
|-------|--------|---|------|--------|--------|-------------|
| 16 | 17.1.1 | Providing and fixing water closet squatting pan (Indian type W.C.pan) with 100 mm sand cast Iron P or S trap, 10 litre low fixtures complete, including cutting and making good the walls and level white P.V.C. flushing cistern, including flush pipe, with manually controlled device (handle lever) conforming to IS : 7231, with all fittings and floors wherever required : White Vitreous china Orissa pattern W.C. pan of size 580x440 mm with integral type foot rests make company Parryware | 1.0 | each | 3049.3 | 3049.3 |
| 17 | NS | PVC 100 MM Trap | 2.0 | each | 300 | 600 |
| 18 | NS | 40 mm PVC Pipe | 90.0 | feet | 30 | 2700 |
| 19 | NS | 40 mm ELBo | 14 | each | 30 | 420 |
| 20 | NS | 40 mm TEE | 2.0 | each | 30 | 60 |
| 21 | NS | solvent 100 gm | 4.0 | each | 50 | 200 |
| 22 | NS | Fitting charge 5 to 19 | 1 | 5 to19 | 10000 | 10000 |
| Total | | | | | | 255788.4963 |

| Sl. No. | Rate Tendered | In Figure | In Words |
|---------|----------------------------------|-----------|----------|
| 1 | Percentage below estimated cost | | |
| 2 | On estimated Cost | | |
| 3 | Percentage above Estimated Cost | | |
| 4 | Number of Cutting / Over Writing | | |

Signature of Bidder

Date

Rubber Stamp of the Firm

Address

Phone No./Mobile No. E-mail Address

Prof. (Dr.) S. P. Singh
Registrar

CHANAKYA NATIONAL LAW UNIVERSITY, PATNA

Nyaya Nagar, Mithapur, Patna -1, Ph. No. – 0612-2352300, Website : www.cnl.u.ac.in

NIT No. - 02/2017-18 (Group A, B, C, D, E & F)

Dated: - 18/05/2017

NIT No. 02/2017-18 (Group E) Dated 18/05/2017

Name of Work:- Inner / Outer Painting, & Enamel work in Narmada

Painting Work : Type I

Earnests Money: Rs. 9000/-

Document Cost: Rs. 1250/-

Time of completion Work: 1 month

| Sl.No | SOR/DSR | ITEM DESCRIPTION | Qty. Of | Unit | Rate(₹) | Amount(₹) |
|-------|---------|---|---------|------|---------|-----------|
| 1 | 13.74 | Removing white or colour wash by scrapping and sand paper in and preparing the surface smooth including necessary repair scratches etc. complete <u>Celling Inner Wall</u> Room 10.475x3.0x4=377.10 m2 wall - 50.95x3.20x3x4=1956.48 corridor Wall -13.77x3.20x3x2=264.38 41.0x1.5x2.x4=492 4.0x2.5x4x3=120 15x3.3x3=148.50 3.15x4.20x2=29.61 1/2x4x4=8.0 14.70x2x3.32x2=195.21 16.0x3.32x2=106.24 .2x3.3x6=23.76 Parapet 41.0x1.0x2x2=164.0 Total =4050.28 m2 <u>outer Wall</u> 76.175x4.6x2x2=1401.62 | 5451.90 | sqm | 4.6 | 25078.74 |
| 2 | 13.80A2 | Providing and applying white cement based putty of average thickness 1 mm, of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth same aria item no. 1 company make Birla wall putty and J.K. Wall putty. | 109.0 | sqm | 77.4 | 8436.6 |
| 3 | 13.82.3 | Painting with ready mixed paint of approved brand and manufacture in all shades to give an even shade:Old steel work (Two coats) company make ASAIN/Equivalent First Quality (approved by university) <u>Windows</u> - 2x1.5x1.35x6x4=97.20, 2x.75x1.35x6x4=48.6 <u>C.G.gate</u> -3.0x2.4=7.2 chaukhat & Stair 5.0x.5x5x3x4=150.0 | 302.20 | sqm | 40.7 | 12299.54 |

CHANAKYA NATIONAL LAW UNIVERSITY, PATNA

Nyaya Nagar, Mithapur, Patna -1, Ph. No. – 0612-2352300, Website : www.cnl.u.ac.in

NIT No. - 02/2017-18 (Group A, B, C, D, E & F)

Dated: - 18/05/2017

| | | | | | | |
|--------------|---------|--|--------|--------|--------|-----------|
| 4 | 13.77A2 | Distempering with 1st quality washable distemper (ready made) of approved manufacturer and of required shade and colour complete. As per manufacture's specifications. Two or more coats on new work Asian Paints | 3922.0 | sqm | 22.9 | 89813.8 |
| 5 | 13.78 | Applying one coat of cement primer of approved brand and manufacture on wall surface: company make ASAIN/Equivalent First Quality (approved by university) same aria item no. 1 | 3922.0 | sqm | 26.9 | 105501.8 |
| 6 | 13.17.2 | 12 mm cement plaster 1:4(1 cement: 4coarse sand) finished with a floating coat of near cement Details of cost for 10 sqm corridor-12.0x2.5=30.0 Main entrence - 8.0x12.0=96.0 | 126.0 | sqm | 145.5 | 18333 |
| 7 | 7189 | U-PVC pipes (working pressure 4 kg/cm2) Single socketed ipe 100 mm dia. | 60.0 | m | 134.23 | 8053.8 |
| 8 | 7209 | UPVC bend 87.50 110 mm bend | 6.0 | each | 98.85 | 593.1 |
| 9 | 7215 | UPVC pipe clip 110 mm bend | 16 | each | 32.26 | 516.16 |
| 10 | NS | solvent 100 gm | 3.0 | each | 50 | 150 |
| 11 | NS | 125 mm CP Jali | 8.0 | each | 35 | 280 |
| 12 | NS | Fitting charge 6 to 10 | 1 | 6 to10 | 2500 | 2500 |
| Total | | | | | | 271556.54 |

| Sl. No. | Rate Tendered | In Figure | In Words |
|---------|----------------------------------|-----------|----------|
| 1 | Percentage below estimated cost | | |
| 2 | On estimated Cost | | |
| 3 | Percentage above Estimated Cost | | |
| 4 | Number of Cutting / Over Writing | | |

Signature of Bidder

Date

Rubber Stamp of the Firm

Address

Phone No./Mobile No. E-mail Address

Prof. (Dr.) S. P. Singh
Registrar

CHANAKYA NATIONAL LAW UNIVERSITY, PATNA

Nyaya Nagar, Mithapur, Patna -1, Ph. No. – 0612-2352300, Website : www.cnl.u.ac.in

NIT No. - 02/2017-18 (Group A, B, C, D, E & F)

Dated: - 18/05/2017

NIT No. 02/2017-18 (Group F) Dated 18/05/2017

Name of Work:- Repairing work in Girls , Boys, Narmada, Type -I, Type-IV, Basket Ball Court Leveling. Painting Work: Type I, Type-IV, Basket Ball Court Leveling

Earnests Money: Rs. 9000/-

Document Cost: Rs. 1250/-

Time of completion Work: 1 month

| Sl.No | SOR/DSR | ITEM DESCRIPTION | Qty. Of | Unit | Rate(₹) | Amount(₹) |
|-------|---------|--|---------|------|---------|-----------|
| 1 | 2.28 | Supplying and Filling in plinth with local sand and under floors including, watering, ramming consolidating and dressing complete. 3.5x2.8=9.8 6.0x3.0=18.0 3.0x24.0=72.0 18.0x7.3=131.40 2.5x21.0=52.5 5.3x6.0=31.80 6.0x4.0x=24.0 <u>6.0x9.0x=54.0</u> Total=429.90 South side 2.2x24.0=52.80 North Side 1.50x36.0=54.0 Grand Total=536.70x.2=107.34 | 107.34 | cum | 204.4 | 21940.296 |
| 2 | 11.1.2 | Brick on edge flooring with bricks of class designation 100A including cement slurry etc. complete in cement mortar. 1:6 (1 cement:6 coarse sand) | 429.90 | sqm | 579.3 | 249041.07 |
| 3 | 6.1.14A | Brick work with bricks of class designation 100A in foundations and plinth in :Cement mortar 1:6 (1 cement: 6 coarse sand) Chamber Hight work Boys Hostel -23, Admin-1 3.2x.3x.25x24=5.76 | 5.76 | cum | 4490.6 | 25865.856 |
| 4 | 13.11.4 | Cement plaster in course sand 12 mm cement plaster of mix: 1:6(1 cement: 6 coarse sand) 3.2x.3x24=23.0 | 23.0 | sqm | 101.2 | 2327.6 |
| 5 | 4.1.3 | Providing and laying in position cement concrete of specified grade exluding the cost of centring and shuttering-all work upto plinth level. 1:2:4(1 Cement: 2 coarse sand:4 graded stone aggregate 20 mm nominal size) | .54 | cum | 3219.7 | 1738.638 |

CHANAKYA NATIONAL LAW UNIVERSITY, PATNA

Nyaya Nagar, Mithapur, Patna -1, Ph. No. – 0612-2352300, Website : www.cnl.u.ac.in

NIT No. - 02/2017-18 (Group A, B, C, D, E & F)

Dated: - 18/05/2017

| 6 | 5.22 | Reinforcement for R.C.C. work including straightening, cutting, bending, placing in position and binding all complete. Thermo-Mechanically Treated bars TMTC-500-10mm dia. | 80.0 | kg | 54.7 | 4376 |
|--|---------|---|---------|------|---------|-----------|
| | | Total | | | | 305289.46 |
| Basket Ball Court Level work- II (Group -F) | | | | | | |
| Sl.No | SOR/DSR | ITEM DESCRIPTION | Qty. Of | Unit | Rate(₹) | Amount(₹) |
| 1 | 11.3 | Cement concrete flooring 1:2:4(1 cement:2 coarse:sand:4 graded stone agregate) finished with a floating coat of neat cement including cement slurry, etc. but excluding the cost of nosing of steps etc. complete. 40 mm thick with 20 mm nominal size stone aggregate. 29.3x10.3=301.79 | 301.79 | sqm | 245.7 | 74149.803 |
| 2 | 15.56 | Dismantling old plaster or skirting raking out joints and cleaning the surface for plaster including disposal of rubbish to the dumping ground within 50 metres lead. | 301.79 | sqm | 12.8 | 3862.912 |
| 3 | 13.82.3 | Centring and shuttering including strutting, propping etc. and removal or form work for Foundations, footings, bases Columns 2x29.3x.15=8.79 2x10.3x1.5=3.09 | 11.88 | sqm | 166.3 | 1975.644 |
| | | Total | | | | 79988.359 |

CHANAKYA NATIONAL LAW UNIVERSITY, PATNA

Nyaya Nagar, Mithapur, Patna -1, Ph. No. – 0612-2352300, Website : www.cnl.u.ac.in

NIT No. - 02/2017-18 (Group A, B, C, D, E & F)

Dated: - 18/05/2017

| III (Group- F) | | | | | | |
|----------------|---------|---|---------|------|---------|------------------|
| Sl.No | SOR/DSR | ITEM DESCRIPTION | Qty. Of | Unit | Rate(₹) | Amount(₹) |
| 1 | 4.1.3 | Providing and laying in position cement concrete of specified grade excluding the cost of centring and shuttering-all work upto plinth level. 1:2:4(1 Cement: 2 coarse sand:4 graded stone aggregate 20 mm nominal size) Cement make Ultratech , ACC and equivalent <u>East Side</u> 1/2x2.0x5.0x 5.0 =25.0 m2 150x4x1=6.0 m2 1.50x6=6.0 m2 1.50x20=3.0m2 <u>South Side</u> 2x1/2 x 6.0 x6.0 =36.0 m2 2x6.0x1.50=18.0 m2 <u>Boys Hostel</u> West Side 1.50x6.0=9.0 m2 1.50x3.0=4.50 m2 <u>1.50x4.0=6.0 m2</u> Total 113.5 x .075 = 8.51 | 8.51 | cum | 3323 | 28278.73 |
| 2 | 14.1 | Repairs to plaster of thickness 12 mm to 20 mm in patches of area 2.5 sqm and under including cutting the patch in proper shape and preparing and plastering the surface of the walls complete including disposal of rubbish to the dumping ground within 50 metres lead. With cement mortar 1:4(1 cement:4 coarse sand) Cement make Ultratech , ACC and equivalent Girls Hostel Balcony 10x3.5x.3 =1050 m2 Boys Hostel Balcony 10x3.5x.3=1050 m2 65x.3=9.5 Narmada quarter 165x.3=49.5 quarter Type I 175x.3=52.5 <u>quarter Type IV 185x.3=55.5</u> | 198.0 | sqm | 171 | 33858 |
| 3 | 15.2.1 | Demolishing cement concrete including disposal of material within 50 metre lead: 1:3:6 or richer mix same area | 8.51 | cum | 578.3 | 4921.333 |
| | | Total | | | | 67058.063 |
| | | Grand Total | | | | 452335.88 |

CHANAKYA NATIONAL LAW UNIVERSITY, PATNA

Nyaya Nagar, Mithapur, Patna -1, Ph. No. – 0612-2352300, Website : www.cnlu.ac.in

NIT No. - 02/2017-18 (Group A, B, C, D, E & F)

Dated: - 18/05/2017

| Sl. No. | Rate Tendered | In Figure | In Words |
|---------|----------------------------------|-----------|----------|
| 1 | Percentage below estimated cost | | |
| 2 | On estimated Cost | | |
| 3 | Percentage above Estimated Cost | | |
| 4 | Number of Cutting / Over Writing | | |

Signature of Bidder

Date

Rubber Stamp of the Firm

Address

Phone No./Mobile No. E-mail Address

Prof. (Dr.) S. P. Singh
Registrar